




COMANSA

LINDEN 2100

21 LC 290


39,670 lbs.

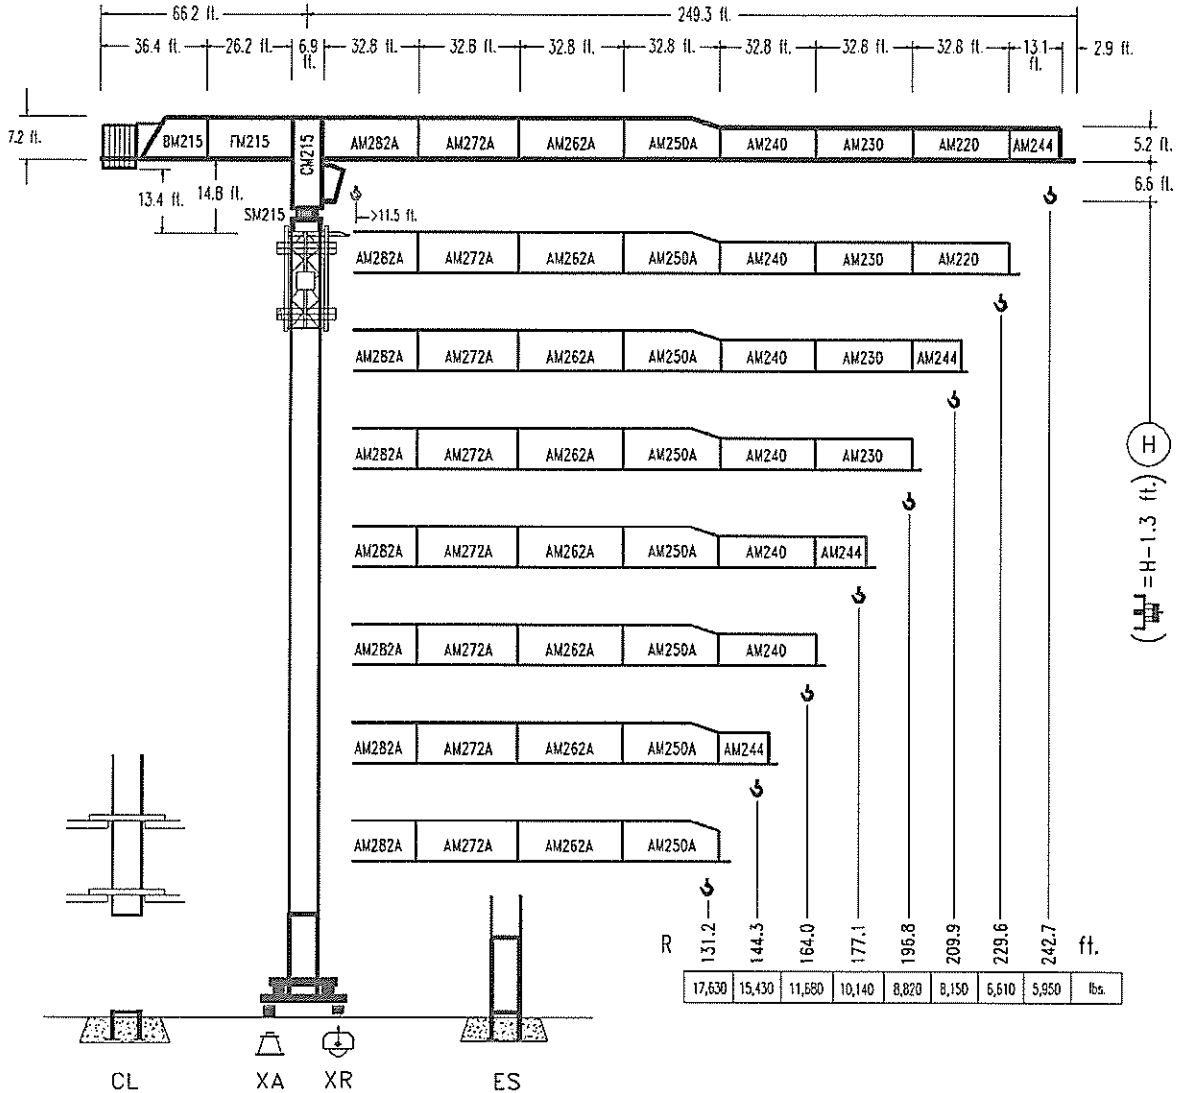


$$\left(\frac{H}{1.3}\right) = H - 1.3 \text{ ft.}$$


CE
DIN 15018 H1 B3

R																
242.7	46.9	49.2	65.6	84.6	84.9	98.4	111.5	131.2	144.3	164.0	177.1	196.8	209.9	229.6	242.7	ft.
	39,670	37,480	26,810	19,840	19,840	16,880	14,680	12,220	10,970	9,480	8,660	7,660	7,100	6,370	5,950	lbs.
229.6	47.9	49.2	65.6	86.6	87.6	98.4	111.5	131.2	144.3	164.0	177.1	196.8	209.9	229.6	ft.	
	39,670	38,480	27,550	19,840	19,840	17,460	15,180	12,660	11,360	9,820	8,980	7,940	7,360	6,610	lbs.	
209.9	51.5	65.6	82.0	93.1	95.4	111.5	131.2	144.3	164.0	177.1	196.8	209.9	ft.			
	39,670	29,940	23,070	19,840	19,840	16,710	13,940	12,530	10,840	9,930	8,790	8,150	lbs.			
196.8	51.2	65.6	82.0	92.5	95.4	111.5	131.2	144.3	164.0	177.1	196.8	ft.				
	39,670	29,710	22,900	19,840	19,840	16,720	13,960	12,550	10,860	9,950	8,820	lbs.				
177.1	51.5	65.6	82.0	93.5	97.1	111.5	131.2	144.3	164.0	177.1	ft.					
	39,670	30,000	23,140	19,840	19,840	17,020	14,210	12,780	11,060	10,140	lbs.					
164.0	53.5	65.6	82.0	97.4	101.7	111.5	131.2	144.3	164.0	ft.						
	39,670	31,420	24,270	19,840	19,840	17,940	14,990	13,480	11,680	lbs.						
144.3	59.7	65.6	82.0	98.4	108.6	114.8	131.2	144.3	ft.							
	39,670	35,520	27,500	22,260	19,840	19,840	17,140	15,430	lbs.							
131.2	60.7	65.6	82.0	98.4	110.9	117.7	131.2	ft.								
	39,670	36,340	28,150	22,800	19,840	19,840	17,630	lbs.								



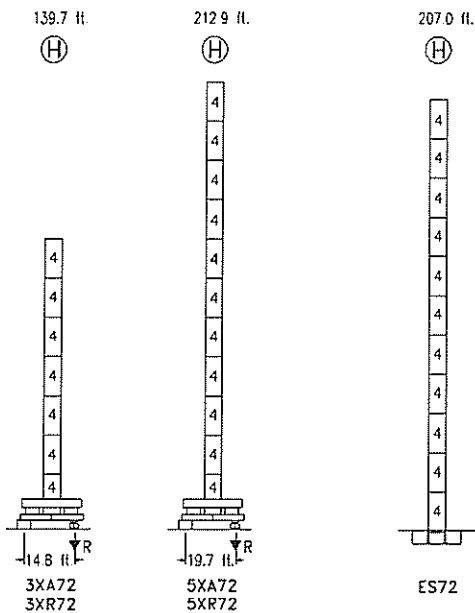

N	Ref.	h (ft.)
3	TD23A	6.6 18.0
4	S25	6.6 18.0
11	CLD23A	6.6 10.2

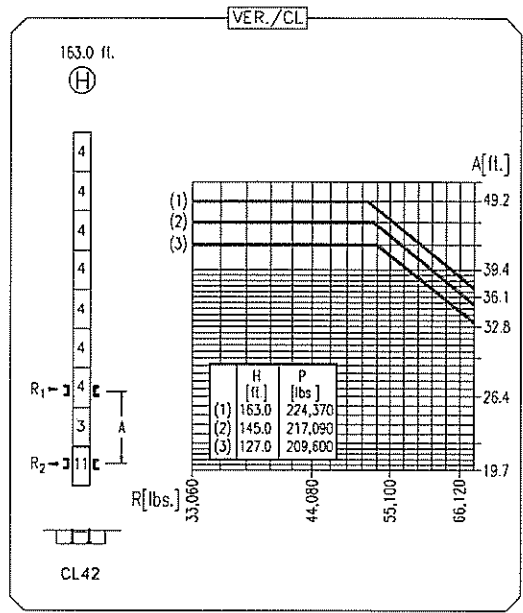

R. máx. En servicio
In operation
En service
In Betrieb

3XR72 ... 233,400 lbs.
5XR72 ... 250,370 lbs.

R. máx. Fuera de servicio
Out of service
Hors service
Ausser Betrieb




3XR72 199,020 lbs.
5XR72 331,260 lbs.

CFU-7.5
10 hp.
0 \varnothing 308 ft./min

GR-12
3 x 88 ft.lbs.
0 \varnothing 0.7 rpm

TRA-7.5
2 x 55 ft.lbs.
0 \varnothing 78 ft./min

TRA-7.5VC
2 x 55 ft.lbs.
0 \varnothing 78 ft./min
5XR72

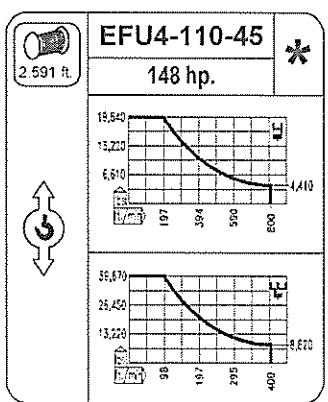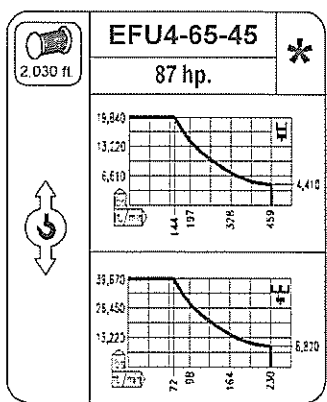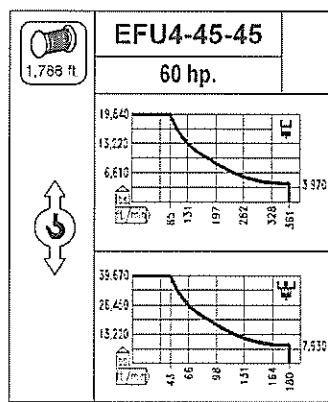

Tensión de alimentación
Operating voltage
Tension de service
Betriebsspannung

480 V
3 ph
60 Hz

Optional
Optional
En option
Kaufoption